
| REV | ECN | DESCRIPTION | DESIGN | DATE |
|---|---|---|---|---|
| 001 | / | NEW | / | 2024-06-26 |
| | | | | |

3,2

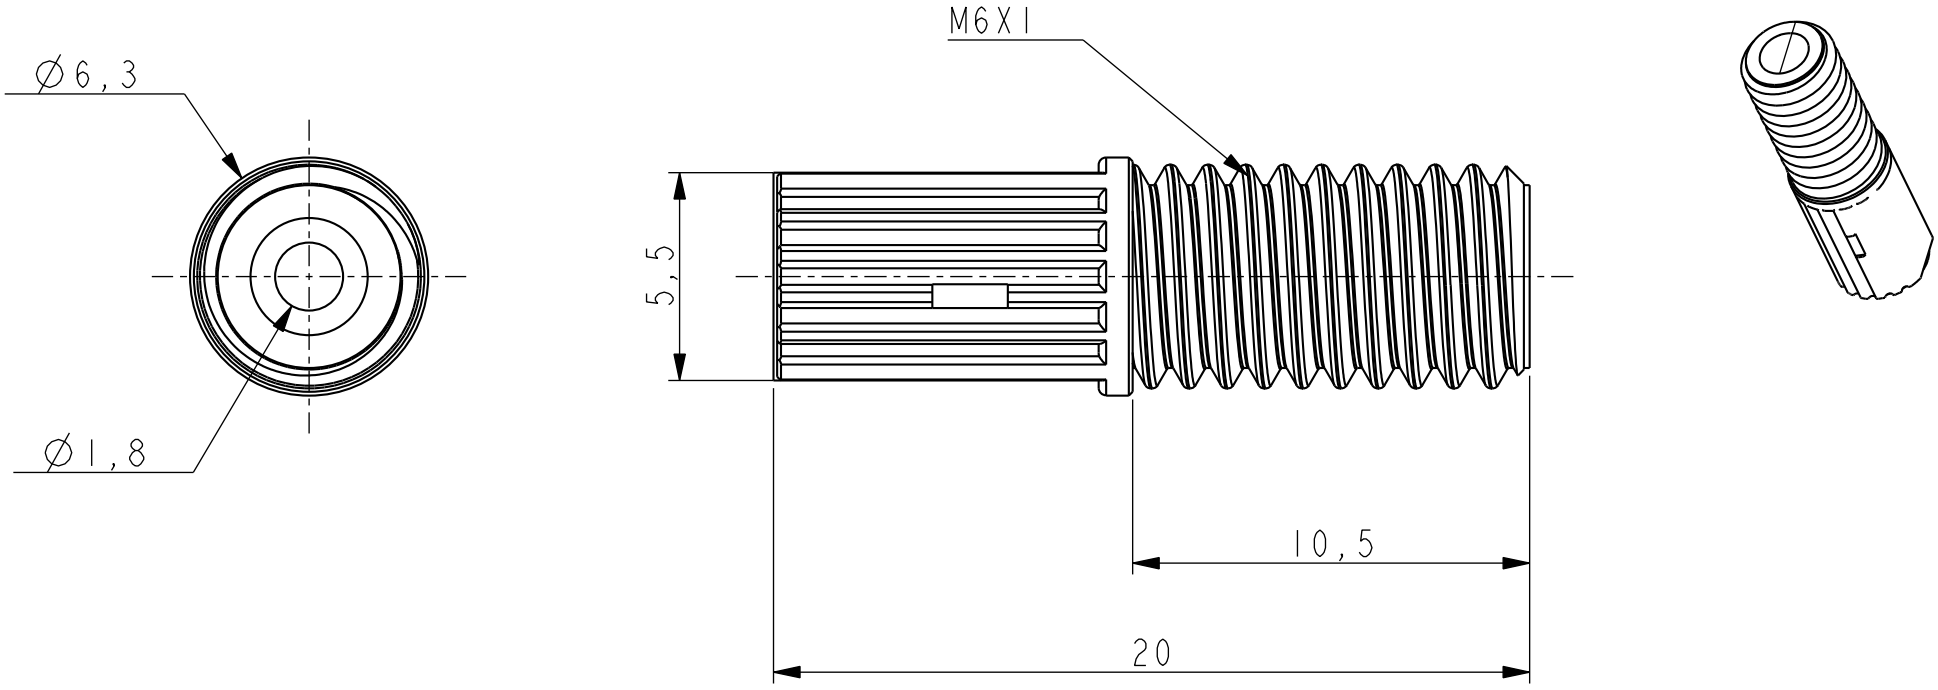


技术要求：
1.未注尺寸按3D；
2.所用材料符合RoHS要求；
3.带"*"为关键要素.

| 一般公差 mm | | | | | |
|---|---|---|---|---|---|
| 0~3 | >3~6 | >6~30 | >30~120 | >120~400 | >400~1000 |
| ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 | ±2 |

This drawing and the information contained therein are the property of Hengyongda Technology Co., LTD., and may not be used without permission.
Reprint, publish or disclose to others without express written consent of Hengyongda Technology Co., LTD.

| FOREACH | | | NAME | 紧凑卡箍接头 HNF6-M6-16-PS-B 809128 | | |
|---|---|---|---|---|---|---|
| DESIGN | / | 2024-06-26 | DWG No. | C-443-02-00661 | REV | 001 |
| CHECK | | | MAT | 140D/黑色 | Scale | 5:1 |
| APPR. | | | 140D | IP /0.57 | A4 | 1 / 1 |